






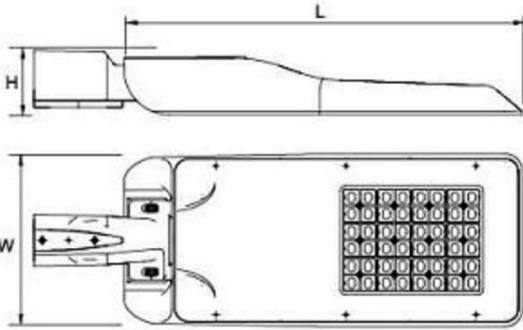







TAKTON MALMÖ

Mounting Instruction

Asennusohje / Monteringsanvisning / Montāžas instrukcija

	LED	~220V...240V 50/60Hz	IP66	IK09		
	 Disconnect before servicing Irrota ennen hoidtoa Koppla bort innan service Atslēgt pirms apkalpošanas					


	<p>DKS 274, DKS 674 - 550x242x75 (LxWxH) DKS 275, DKS 675 - 675x257x81,4 (LxWxH)</p>
	
<p>Net weight, no more / Nettopaino, ei enää / Nettovikt, inte mer: DKS674 - 4,5kg, DKS675 - 6,5kg Svars Neto</p>	

 \varnothing mm 48-60		 $\pm 10^\circ$	
 \varnothing mm 48-60			


15Nm




For version with cable/ Versiota varten kaapelilla/ För version med kabel
Versijai ar kabeli




Blue/ Sininen/Blå Yellow-green/ Kallenvihreä/ Gulgrön
Brown/ Ruskea/ Brun Zils/Zaiš-dzeltens/Brūns

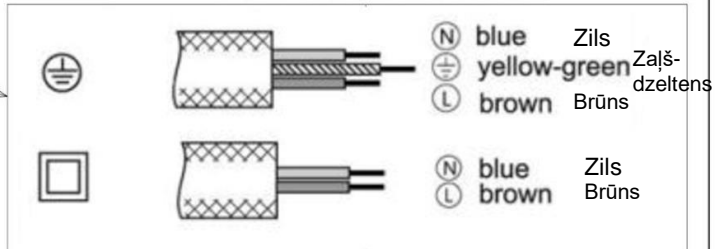

Constant Light Output/ Vakio valoteho/ Konstant ljusutgång Konstantā Gaismas Plūsma

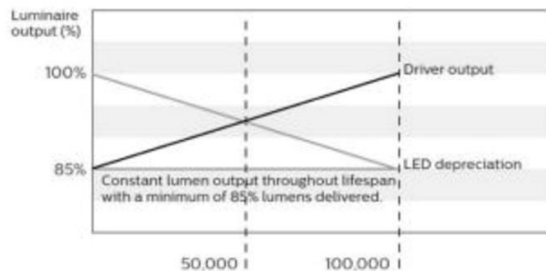

Auto dimming/ Automaattinen himmennys/ Automatisk dimming - Dynadimmer Automātiskā dimēšana - Dynadimmer

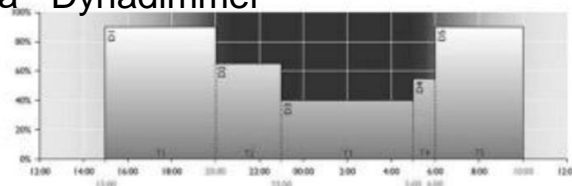

Led modules can be replaced by manufacturer only/ Led-moduulit voidaan korvata vain valmistajalla/
Ledda moduler kan endast bytas ut av tillverkaren.
Windage area, no more/ Tuuletusalue, ei enää/ Vindkraft område, inte mer/ Vēja pretestības platība:
DKS674 - 0,14m² above/below/ylhäällä/alhaalla/ovan/nedan and/ja/och 0,042m²
side position/sivupaikassa/sidposition/ Sānu projekcija
DKS675 - 0,18m² above/below/ylhäällä/alhaalla/ovan/nedan and/ja/och 0,055m²
side position/sivupaikassa/sidposition/ Sānu projekcija