
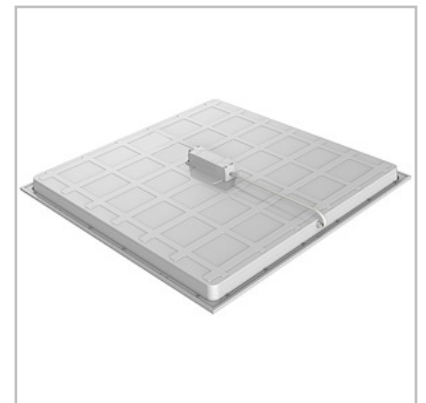


LED panel Effektiv, 22W, 3830lm, 4000K, IP20

Item: 7099306

MALMBERGS

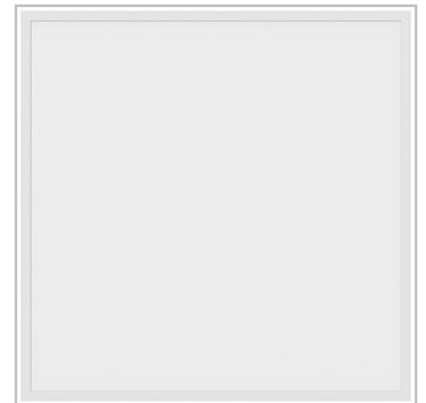

Product information

Recessed light panel with energy class A (227lm/W LED module), which makes it an optimal replacement for current LED tube luminaires and also ideal in new projects. The microprismatic diffuser gives excellent optics and complies with the UGR threshold requirements (UGR<19 for offices) under normal conditions.

Mounting

For recessed mounting in a suspended ceiling with exposed grid system 600x600 mm.

Connection

Incl. supply cable with DC plug male. Supplied without driver. For suitable driver, 600mA, see 'Accessories'.

Description

Body made of steel sheet and white frame made of aluminium. Opal microprismatic diffuser made of PMMA.

Specifications

Beam angle	120°
Brand	Malmbergs Pro
Colour consistency	3 SDCM
Colour rendering index (CRI)	Ra80

LED panel Effektiv, 22W, 3830lm, 4000K, IP20

Item: 7099306

MALMBERGS

Colour temperature	4000K
Constant current input DC	600mA
Dimmable	Yes
Dims (LxWxH)	595x595x34 mm
IP rating	IP20
Lifetime	50 000 hrs (L80 B20)
Luminous flux	3830lm (luminaire), 4400lm (module)
Power	22W (luminaire), 19.4W (module)
Weight	2,2 kg