


# LED Panel Sirius CCT, 36W, IP20, 3000/4000K, 140lm/W

Item: 7099659

**MALMBERGS**

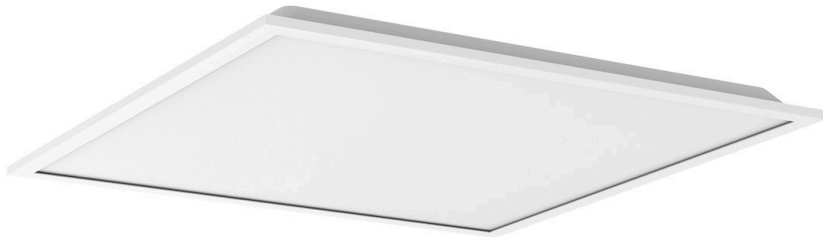

## Product information

Recessed LED panel, ideal for replacing existing fluorescent tube installations and in new projects. The luminaire has excellent optics and complies with the UGR threshold requirements ( $UGR < 19$  for offices) under normal conditions. Simple and quick installation thanks to the pre-installed cable with plug (Euro).

### Mounting

For recessed mounting in a suspended ceiling with exposed grid system 600x600 mm module. Do not cover with insulation.

### Connection

Supplied with 1 m cable (H05VV-F 2x0.75 mm<sup>2</sup>) with Euro plug and LED driver.

### Description

White body made of aluminium and microprismatic diffuser made of polystyrene.

### No. of drivers per MCB

B10 – 14 pc

B16 – 22 pc

C10 – 23 pc

C16 – 37 pc

# LED Panel Sirius CCT, 36W, IP20, 3000/4000K, 140lm/W

Item: 7099659

**MALMBERGS**

## Specifications

Beam angle	90°
Brand	Malmbergs Pro
Colour	White
Colour consistency	3 SDCM
Colour rendering index (CRI)	Ra80
Colour temperature	3000/4000K (Adjustable with DIP switch)
Dimmable	No
Dims (LxWxH)	595x595x35 mm
Efficiency	140lm/W
IP rating	IP20
Lifetime	60 000 hrs (L80 B10)
Luminous flux	5040 lm
Power	36W
Weight	2,0 kg
Voltage	230V