
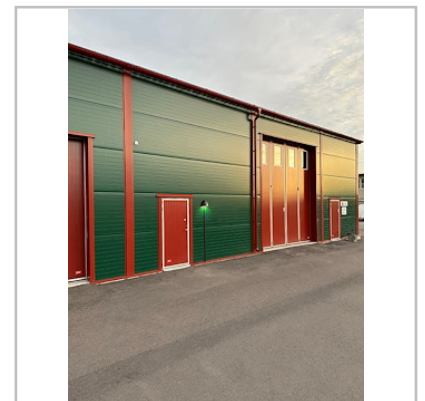
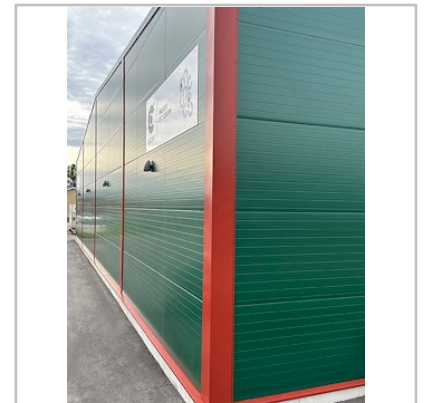


Wall Luminaire M-Wall Pro, 25W, 3000/4000K, IP66, 3375lm

Item: 9977908

MALMBERGS

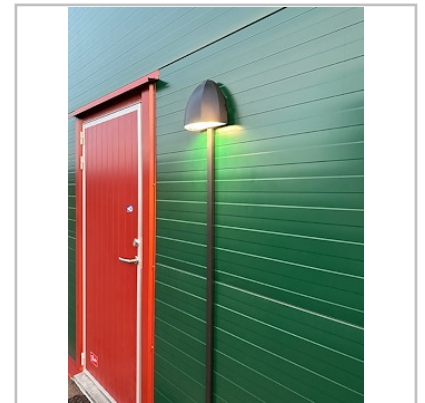

Product information

Modern wall luminaire in robust design. For lighting the exterior of industrial buildings, entrances etc. Supplied with 10kV surge protection device.

Mounting

Surface mounting.

Connection

Fast connection terminal block 3x2.0 mm², via any of the 4 threaded (M20) cable inlets, located on all sides and the back of the luminaire.

Description

Body made of powder coated die-cast aluminium. Front made of polycarbonate.

Specifications

Brand	Malmbergs Pro
Colour	Black
Colour consistency	3 SDCM
Colour rendering index (CRI)	Ra80
Colour temperature	3000/4000K
Dimmable	No
Dims (LxWxH)	238x212x139 mm

Wall Luminaire M-Wall Pro, 25W, 3000/4000K, IP66, 3375lm

Item: 9977908

MALMBERGS

Efficiency	135lm/W
Impact protection	IK10
IP rating	IP66
Lifetime	100 000 hrs (L80 B10)
Luminous flux	3375lm
Power	25W